

# Frame Kit Installation Instructions




## Retractable Pleated Insect Screen



Read Installation Instructions carefully before proceeding  
Ensure that Installation Instructions remain with homeowner.




### Recommended Tools




NOTE: DO NOT USE CIRCULAR SAW  
LAMINATE NON-FERROUS METAL BLADE

### "L" Kit Components



**x1**



**x1**

RST  
TRACK



**x1**


RSJ  
JAMB MOUNTING  
EXTRUSION

RSC  
CHANNEL


**x28**

SC8GX19S  
8G X 19MM  
CSK SCREW

### "T" Kit Components



**x1**



**x1**



RSJ  
JAMB MOUNTING  
EXTRUSION

RSTT  
TALL TRACK

**x28**





SC8GX19S  
8G X 19MM  
CSK SCREW

## Cutting RST or RSTT and RSC

All dimensions are in inches (mm)

Measure the internal frame opening width (W).  
Note: Jamb may be rebated (example shown below)


Depending on the size of the frame RST or RSTT and RSC can be supplied in 2 lengths)

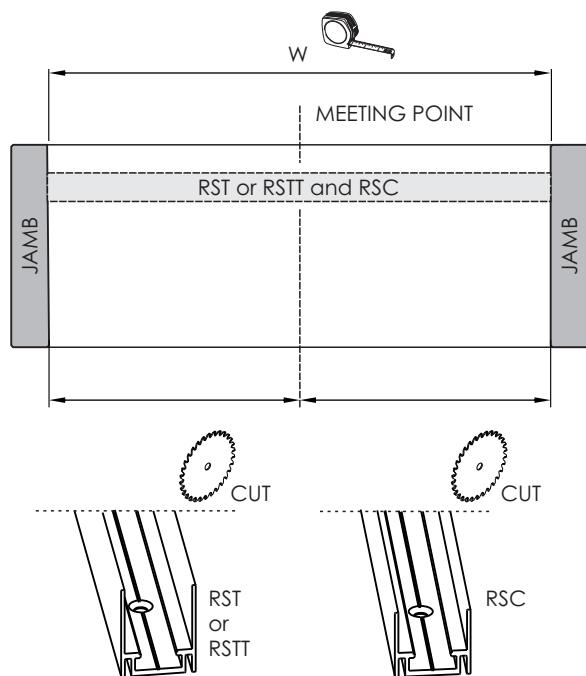

## Cutting RSJ | single or double screen

Measure the internal frame opening frame height (H).


Note: Head and Threshold may be rebated (as shown below)

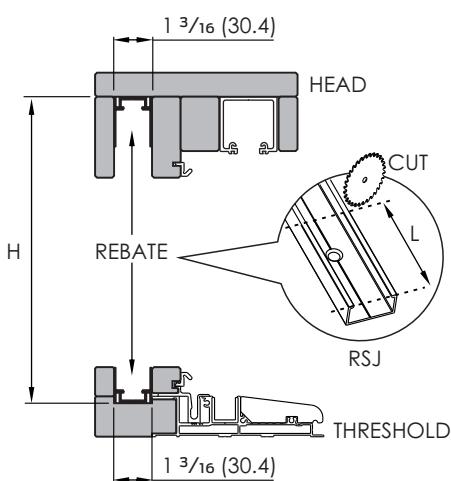

Length of RSJ (L) = H - X\*

\* X = 2 3/4 (70) (RST + RSC + 1/16 (1.5))  
\* X = 3 9/16 (90) (RSTT + RSC + 1/16 (1.5))


Note: For a double screen install, 2 x RSJ extrusions are to be cut and installed

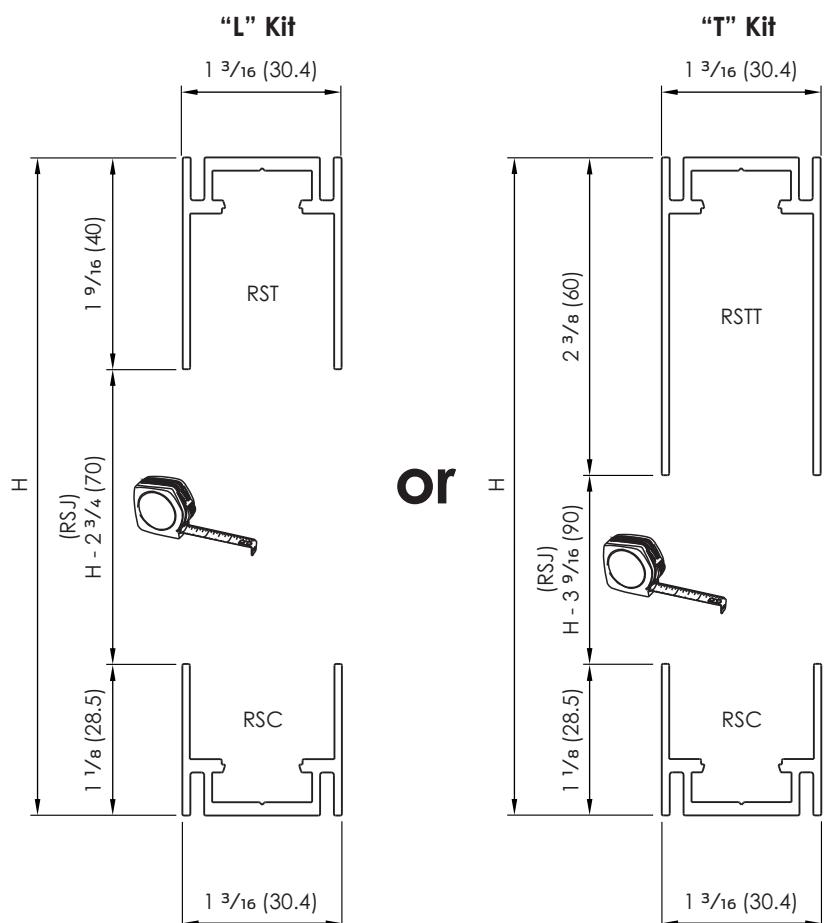

## Cutting RSJ | corner double screen

Measure the internal frame opening frame height (H).

Note: Head and Threshold may be rebated (as shown below)

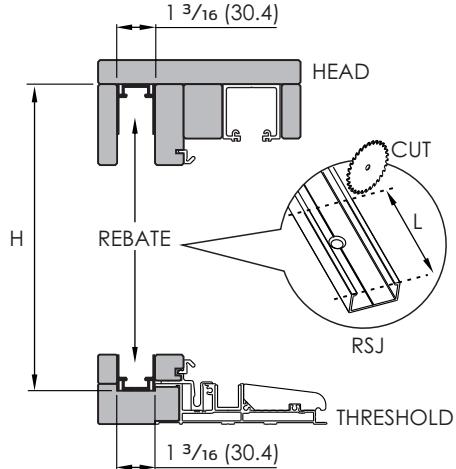


Length of RSJ (L) = H - X\*



\* X =  $2 \frac{3}{4}$  (70) (RST + RSC +  $\frac{1}{16}$  (1.5))

\* X =  $3 \frac{9}{16}$  (90) (RSTT + RSC +  $\frac{1}{16}$  (1.5))

Note: For a corner double screen install, 2 x RSJ extrusions are to be cut and installed

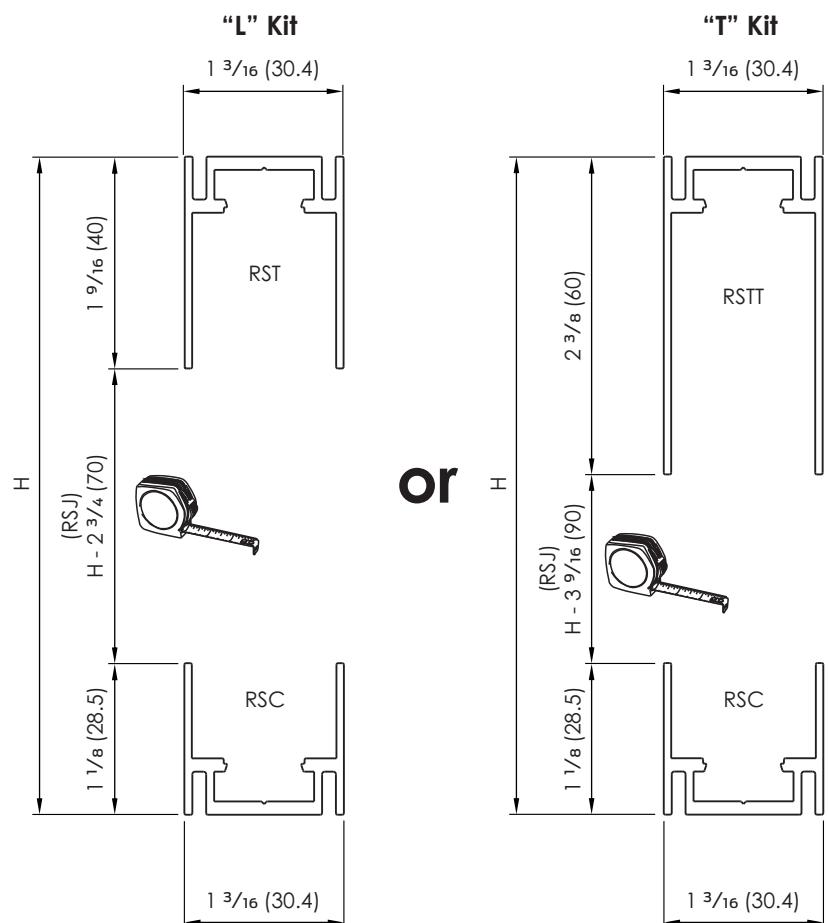

## Cutting RST or RSTT and RSC | open joint

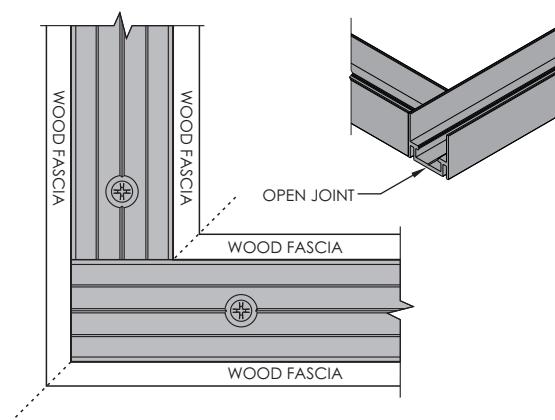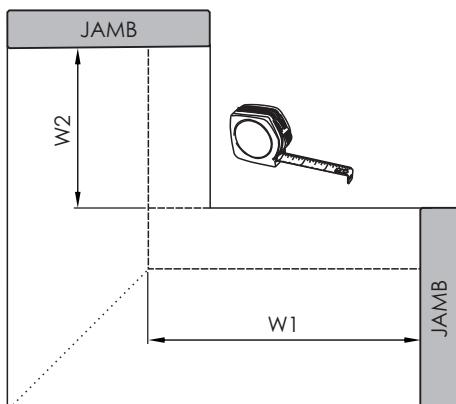


Length of RSC (W2) / RST or RSTT (W2) = W2  
and

Length of RSC (W1) / RST or RSTT (W1) = W1


## Fitting Frame | single screen

RSC, RST and RSJ have been supplied pre-drilled.  
Place profiles into position and screw fix using screws (SC8GX19S)

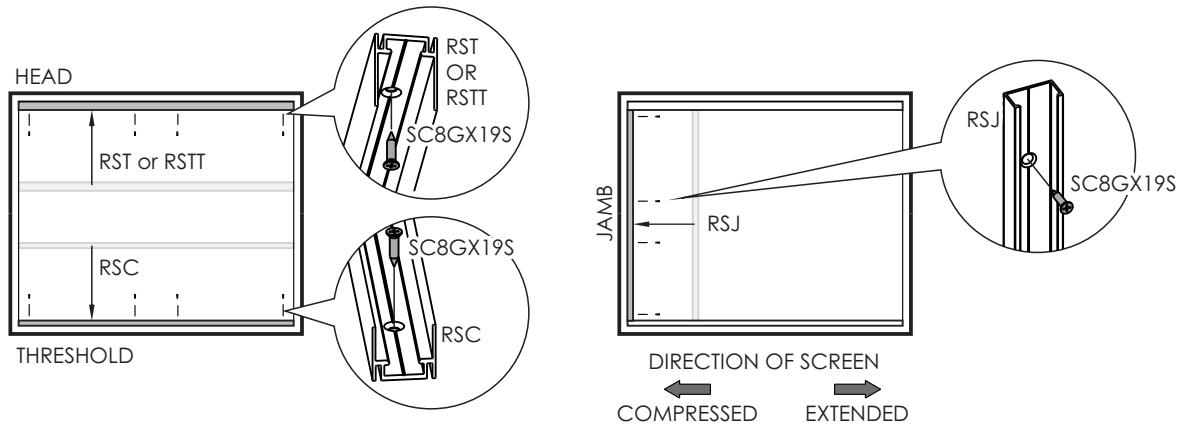

## Fitting Frame | double screen

RSC, RST and RSJ have been supplied pre-drilled.  
Place profiles into position and screw fix using screws (SC8GX19S)

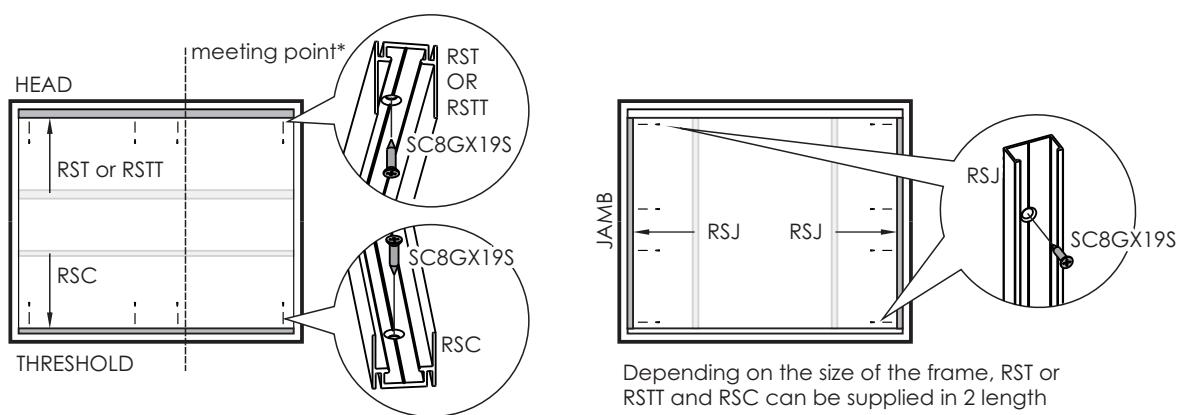

## Fitting Frame | corner double screen

RSC, RST and RSJ have been supplied pre-drilled.  
Place profiles into position and screw fix using screws (SC8GX19S)

